



Rotron MAXIAX[®] 3.00-3.75 Large Vaneaxial Fans

General Large Vaneaxial Information

MAXIAX[®] fans provide relatively high flows against high impedance in a compact axial flow package. They operate at high rotational speeds, typically with 400 Hz motors or internal ECDC brushless motors. MAXIAX[®] fans are extremely efficient and highly customizable, allowing for precise airflow design.


MAXIAX[®] fans are typically utilized to cool airborne radar and other devices with high power transmitters. They are also employed as evaporator/condenser fans in environmental controls systems and to duct air to

various aircraft avionics bays, cockpit displays and cabin compartments. MAXIAX[®] fans are also used extensively in general aviation aircraft, military vehicles and shelters and shipboard applications.

They come in a variety of voltages and frequencies and are available with lead wires, terminal blocks and MS connectors. Most units are available with an optional internal Fan Performance Sensor (FPS) or an internal or external Low Speed Warning Device (LSWD).

Rotron MAXIAX[®] 3.00 to 3.75

Maxiax 3.75 Series: Maximum Performance Curve*

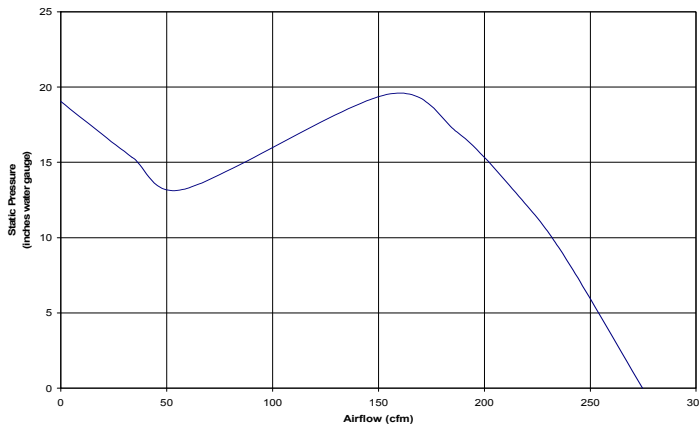

*Individual Performance Curve Characteristics Available Upon Request

General

- Physical envelope: 3.00" to 3.75" diameters, 4.50" to 6.00" lengths¹.
- Weight: 2.75 to 3.80 lbs.
- Specially designed for avionics/equipment cooling and environmental control systems.
- Speeds as high as 23,000 RPM.
- Airflow as high as 275 CFM.
- Functional Static Pressures: as high as 19 IWG.

Materials and Finishes

- All aluminum components finished with a chemical conversion coating per MIL-C-5541, top coat of lusterless black enamel, color #37038, per Federal Standard 595 conforming to TT-E-489 Type B.
- Corrosion-resistant stainless steel shaft and hardware.
- Impeller runs on two high-precision, double-shielded, stainless steel ball bearings (ABEC Class 5) for a long, maintenance-free life.
- Motors have stator winding insulation which is rated for continuous duty for either Class F or Class H.

¹ Note: See specific part-number drawing for complete product dimensions

Options/Accessories

- Flanges
- Beads
- Check Valves
- Custom Designs Available
- Integral EMI filter
- LSWD (Low Speed Warning Device)
- FPS (Fan Performance Sensor)





AC Line Powered Units ¹

- 3-phase and 1-phase permanent-split capacitor motor designs.
- Fixed speeds (performance) based on input frequency.
- Meets or exceeds the requirements of MIL-B-23071 and other applicable U.S. military and commercial aerospace specifications ².
- Max free delivery airflow of 275 CFM at 400 Hz
- Ambient temperature range: -54 °C to 100 °C.
- Acoustic levels as low as 77 dBA.

¹ Airflow, maximum ambient and acoustic levels will vary depending on design parameters

² Please call for further information concerning applicable U.S. military and commercial aerospace specifications

DC Powered Units – E.C.D.C. ¹

- Brushless permanent magnet design (Electronically Commutated DC).
- Speed (performance) fixed by input voltage.
- Meets or exceeds the requirements of MIL-B-28873 and other applicable U.S. military and commercial aerospace specifications ².
- Max free delivery airflow of 149 CFM.
- Ambient temperature range: -40 °C to 90 °C.
- Acoustic levels as low as 77 dBA.
- Standard 24 and 28 volt designs.

Optional DC-AC Inverters and AC-AC Converters for AC Powered Models¹

BATAC[®] Inverter Driven Units

- AC square wave fans driven from a DC power source through a BATAC[®] Inverter.
- Low cost alternative when multiple fans are used in a single application or area.
- Allows for greater than 100 VDC input voltage.

¹ See Accessories: Power Conversion

DELTA[®] Converter Driven Units

- DELTAC[®] converters allow high frequency (typically 400 Hz) fans to be driven by variable frequency (typically 360-800 Hz) power or low frequency 50/60 Hz power to obtain the higher frequency performance.

Unit Description Key

The unit description key is for reference only and should not be confused with a part number. While most units are custom configurations, not all variations of the key shown below are possible. Please contact the Application Engineering department for more information regarding possible custom configurations.

AC MODELS

MAX 475 01 A Q 2 C L N 1894 JF

- MOTOR SERIES
- FAN PERFORMANCE SENSOR
N- WITHOUT, S-WITH
- CONNECTOR
L- LEADWIRES
M- MILITARY, MS ATTACHED TO HOUSING
N- MILITARY, MS ATTACHED TO LEADS
T- TERMINAL BLOCK
- MOUNTING CONFIGURATION
A- FLANGED, INLET ONLY
B- FLANGED, OUTLET ONLY
C- FLANGED, BOTH ENDS
D- FLANGED INLET, BEADED OUTLET
E- FLANGED OUTLET, BEADED INLET
F- BEADED, BOTH ENDS
G- FLANGED CENTER, PLAIN ENDS
H- FLANGED CENTER, BEADED ENDS
I- PLAIN, BOTH ENDS
J- FLANGED INLET ONLY WITH INLET PERFORMANCE RING
K- FLANGED OUTLET ONLY WITH INLET PERFORMANCE RING
L- FLANGED, BOTH ENDS WITH INLET PERFORMANCE RING
M- FLANGED INLET, BEADED OUTLET WITH INLET PERFORMANCE RING
N- FLANGED OUTLET, BEADED INLET WITH INLET PERFORMANCE RING
O- BEADED, BOTH ENDS WITH INLET PERFORMANCE RING
P- FLANGED CENTER, PLAIN ENDS WITH INLET PERFORMANCE RING
Q- FLANGED CENTER, BEADED ENDS WITH INLET PERFORMANCE RING
R- PLAIN, BOTH ENDS WITH INLET PERFORMANCE RING
S- LEGS, WITH INLET PERFORMANCE RING
T- SERVO RINGS, BOTH ENDS
X- SPECIAL
- VOLTAGE
1- 115
2- 200
3- 115/230
4- 416
- ELECTRICAL DATA
A- AC LINE OPERATED
- DESIGN SEQUENCE
- SIZE GROUP
APPROXIMATE HOUSING O.D.;
NUMBER IS DIMENSIONED IN
INCHES TO TWO DECIMAL
PLACES. THE PERIOD IS NOT
SHOWN

	NO. POLES	NO. PHASES	APPOX. SPEED- NO LOAD (REF.)		
			50 Hz	60 Hz	400 Hz
A	2	3	2900	3500	-
B	4	3	1450	1750	-
E	6	1 OR 3	950	1150	-
F	8	1 OR 3	700	850	-
K	2	1	2900	3500	-
L	4	1	1450	1750	-
M	6	1 OR 3	-	-	7500
N	8	1 OR 3	-	-	5500
P	12	1 OR 3	-	-	3900
Q	4	1 OR 3	-	-	11000
R	2	1 OR 3	-	-	23000

NOTE: DUAL FREQUENCY OR DUAL POLE MOTORS DESIGNATED BY USING 2 DIGITS. EX: KM = (2 POLE 1Φ 50/60 Hz, 6 POLE 1Φ 400 Hz)

DC MODELS (SAME AS AC EXCEPT WHERE INDICATED)

MAX 420 01 D 28 S N N 1894 JF

- VOLTAGE
- ELECTRICAL DATA
D- DC LINE OPERATED
E- ECDC
M- MCDC

EXAMPLE: MAX47501AQ2CL, N, 1894 JF

Ordering Information

When ordering, please specify the specific Rotron part number listed on the model table below. Further ordering information, based on the configuration and motor series, may be obtained by contacting customer service. Please refer to the Unit Description Key explanation above.



North America
T: +1 845-679-1361
F: +1 845-679-1870

United Kingdom
T: +44 (0) 1932 765822
F: +44 (0) 1932 761098

Specifications subject to change without notice

Europe
T: +49 8145 951767
F: +49 8145 951768

Asia Pacific
T: +65 6484 2388
F: +65 6481 6588

www.ametekaerodefense.com

Contact E-mail: milinqury@ametek.com



Rotron / Airscrew



Standard Product Offering of AC Line Powered Models

Part #	Prod. Desc.	Flow (CFM)	Max Pressure (IWG)	Nom. RPM	Nom. Watts	Line Amps (A)	Max Amb (C)	Weight	Volts	Phase	Hz	Capacitor	Airflow Source Data	Features
041178000	MAX35005 3359Q7	275	19.0	23300	751	3.9	72	3.5	200	3	400	N/A	A495-6	CONNECTOR, THERMAL PROTECTOR
035893000	MAX35001 3151W7	73	3.2	7600	73	0.7	85	3.3	200	3	400	N/A	A448-20	CONNECTOR, THERMAL PROTECTOR
035542000	MAX35000 2711JF	167	7.2	11300	291	1.5	100	3.8	200	3	400	N/A	A382-27A	CONNECTOR
035556000	MAX37500 2727JF	240	6.2	11400	379	1.7	100	3.8	200	3	400	N/A	A506-23	CONNECTOR
041488000	MAX30000 2728SF	114	4.4	11600	159	1.0	72	2.8	200	3	400	N/A	A672-6	CONNECTOR, LSWD
035737000	MAX35001 2728JF	113	7.7	11600	159	1.0	85	3.8	200	3	400	N/A	A386-13	CONNECTOR
035852000	MAX35004 2728Q7	142	6.2	11600	159	1.0	85	3.5	200	3	400	N/A	A442-25	CONNECTOR, NUT PLATES
035107000	MAX37500 3012ZF	228	6.0	11000	391	4.4	100	3.8	115	1	400	5.0/220	A472-29	CONNECTOR

Standard Product Offering of DC Line Powered Models


Part #	Prod. Desc.	Flow (CFM)	Max Pressure (IWG)	Nom. RPM	Nom. Watts	Line Amps (A)	Max Amb (C)	Weight	Volts	Airflow Source Data	Features
012063000	MAX35007 3746RF	130	9.8	15000	122	4.0	70	3.0	28	A661-2	CONNECTOR




Rotron / Airscrew



MAXIAX 30000 – AC

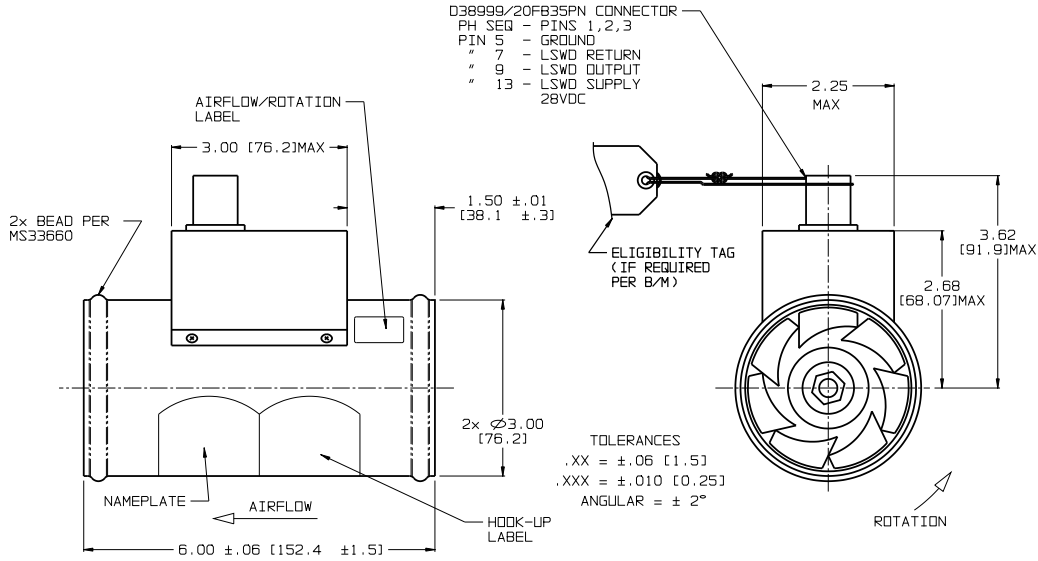

MAXIAX 35000/01/04/05 – AC

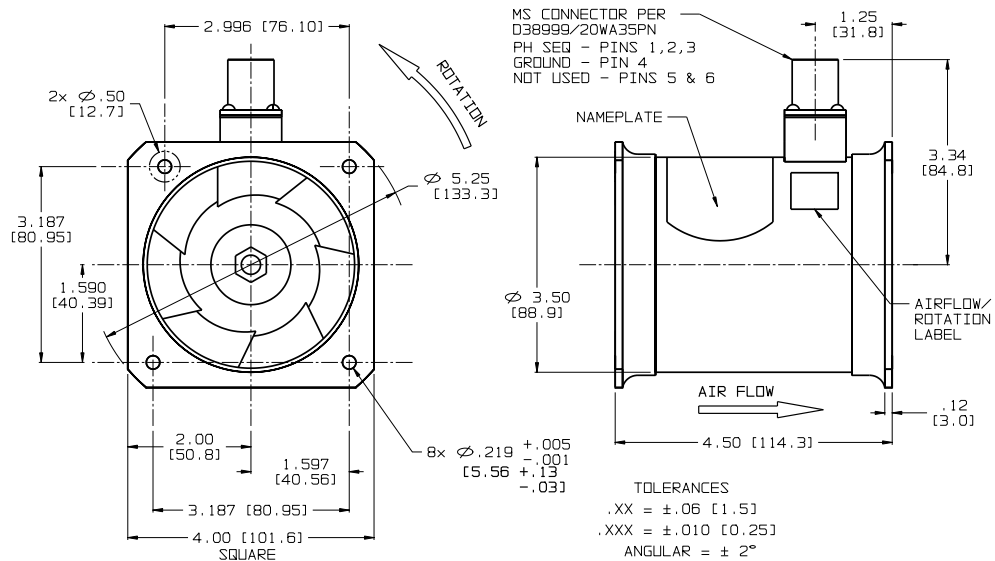





Rotron / Airscrew



MAXIAX 35000/01/04/05 – AC continued

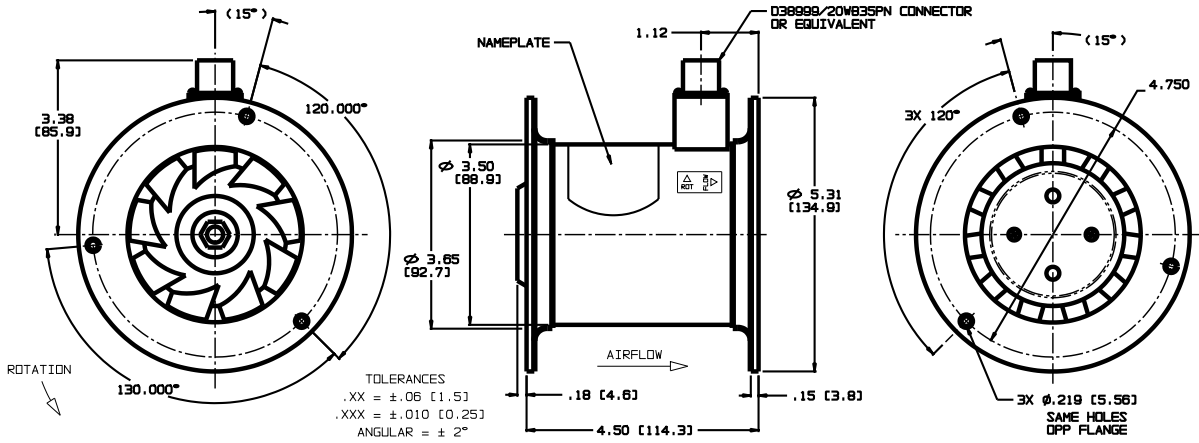

MAXIAX 35007 – DC

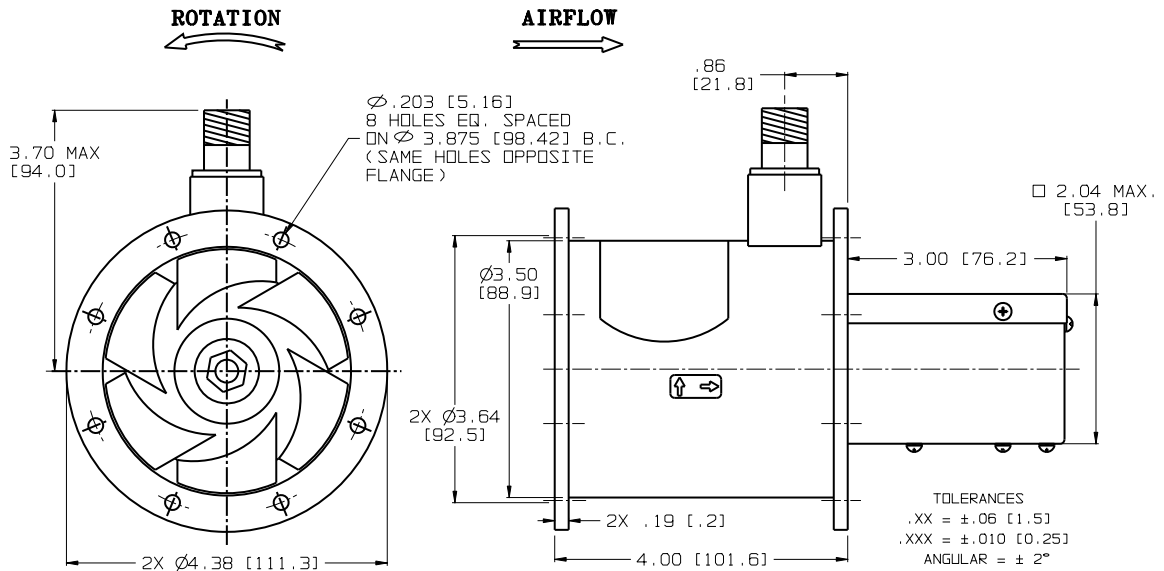




Rotron / Airscrew



MAXIAX 37500 – AC

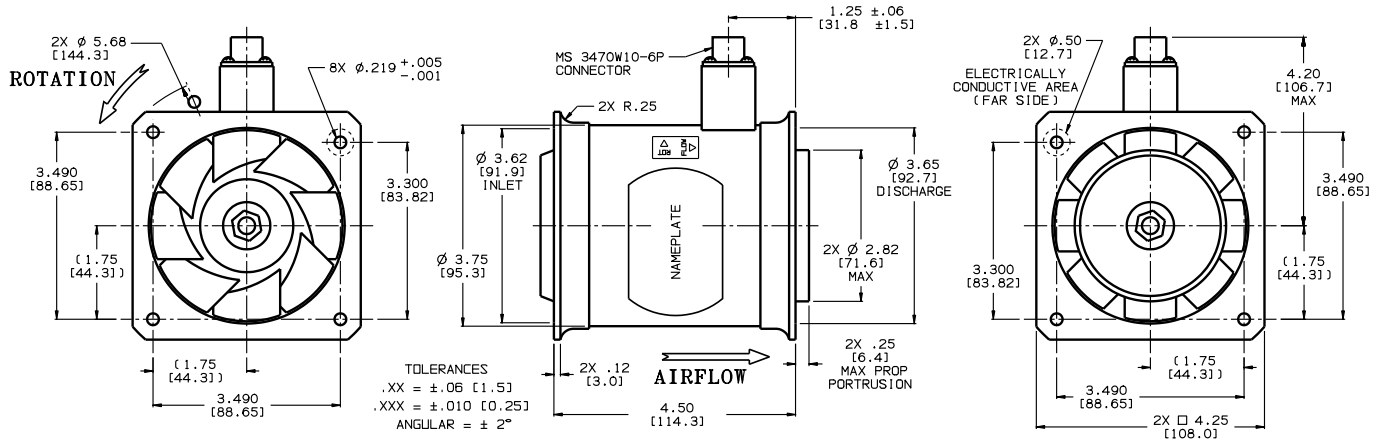





Rotron / Airscrew




P/N 041178000 MAX35005 3359Q7 A495-6

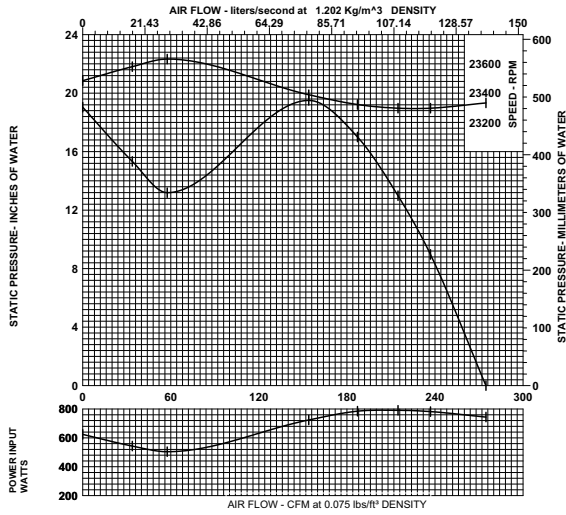


P/N 035893000 MAX35001 3151W7 A448-20

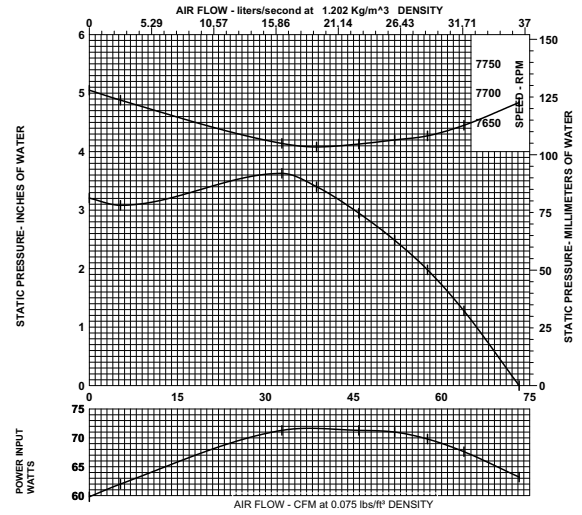


P/N 035542000 MAX35000 2711JF A382-27A

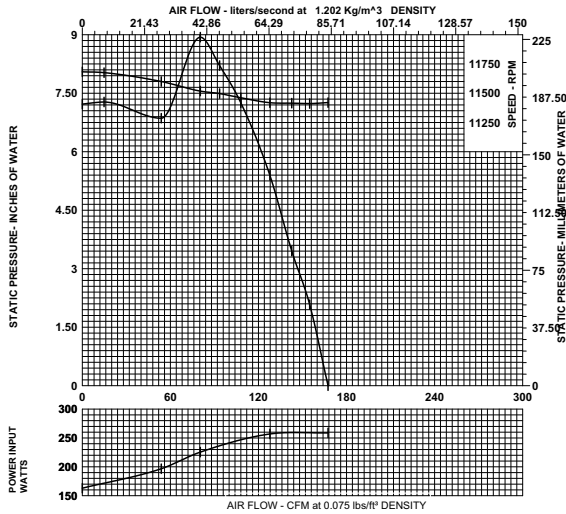


P/N 035556000 MAX37500 2727JF A506-23

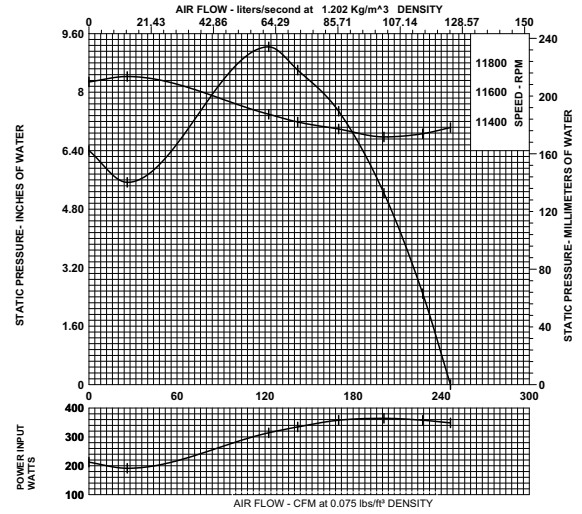

P/N 041488000 MAX30000 2728SF A672-6

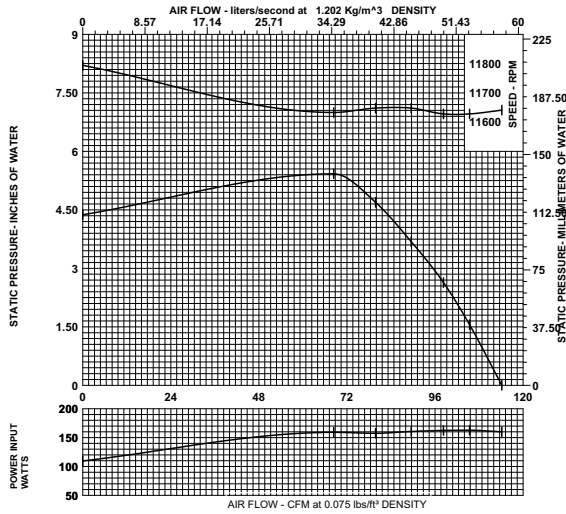

P/N 035737000 MAX35001 2728JF A386-13

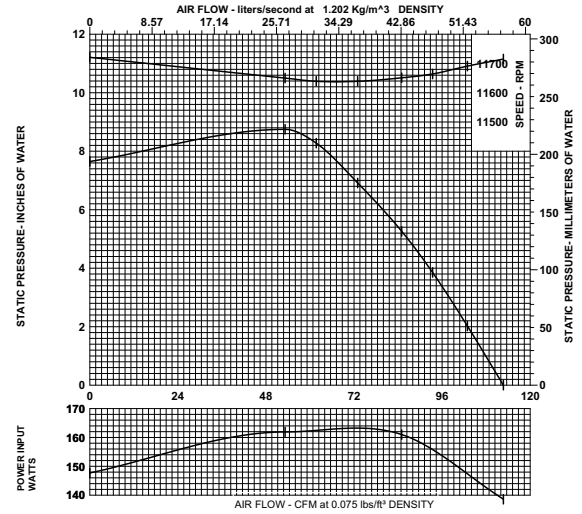





Rotron / Airscrew



P/N 035852000 MAX35004 2728Q7 A442-25

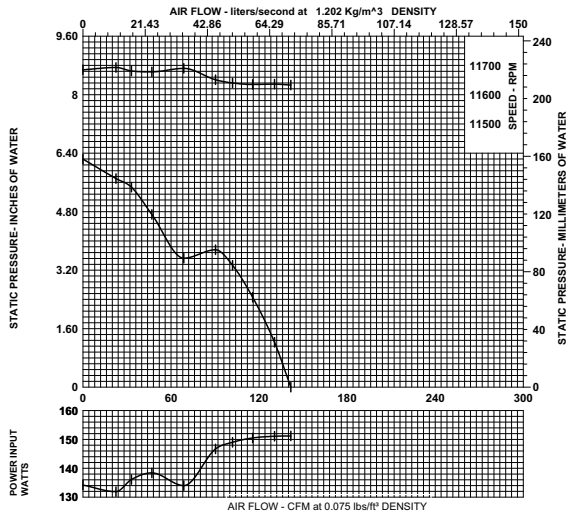

P/N 035107000 MAX37500 3012ZF A472-29

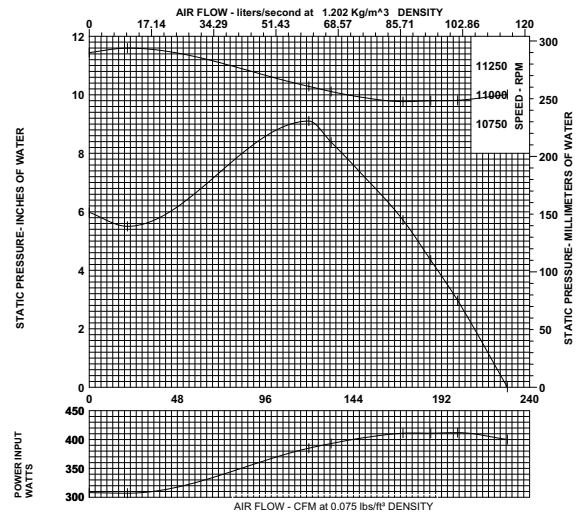

P/N 012063000 MAX35007 3746RF A661-2

